

EUMETSAT Satellite Application Facility on Climate Monitoring

The EUMETSAT
Network of
Satellite
Application
Facilities



CM SAF Cloud, Albedo, Radiation dataset, AVHRR-based, Edition 1 (CLARA-A1)

Surface Radiation Products

Algorithm Theoretical Basis Document

[DOI: 10.5676/EUM_SAF_CM/CLARA_AVHRR/V001](https://doi.org/10.5676/EUM_SAF_CM/CLARA_AVHRR/V001)

Surface Incoming Shortwave Radiation	CM-52
Surface Net Shortwave Radiation	CM-67
Surface Outgoing Longwave Radiation	CM-74
Surface Downward Longwave Radiation	CM-81
Surface Net Longwave Radiation	CM-88
Surface Radiation Budget	CM-95
Cloud Radiative Effect SW	CM-100
Cloud Radiative Effect LW	CM-101

Reference Number: SAF/CM/DWD/ATBD/GAC/RAD

Issue/Revision Index: 1.2

Date: 02.07.2012

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

Document Signature Table

	Name	Function	Signature	Date
Author	Jörg Trentmann	CM SAF scientist		02/07/2012
Author	Richard Müller	CM SAF scientist		02/07/2012
Editor	Rainer Hollmann	Science Coordinator		02/07/2012
Approval	Steering Group			26/09/2012
Release	Martin Werscheck	Project Manager		30/11/2012

Distribution List

Internal Distribution	
Name	No. Copies
DWD Archive	1
CM SAF Team	1

External Distribution		
Company	Name	No. Copies
PUBLIC		1

Document Change Record

Issue/Revision	Date	DCN No.	Changed Pages/Paragraphs
1.0	31/10/2011	SAF/CM/DWD/ATBD/GAC/RAD	First official version presented to DRI-5 review board
1.1	11/05/2012	SAF/CM/DWD/ATBD/GAC/RAD	Correction of typos / editorial changes
1.2	02/07/2012	SAF/CM/DWD/ATBD/GAC/RAD	Implementation of RIDs from DRI-5 review board - editorial update of cover page to account for DOI number and edition name - editorial update of the introduction section of CM SAF

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

Applicable documents

Reference	Title	Code
AD 1	CM SAF Product Requirement Document	SAF/CM/DWD/PRD/1.7

Reference documents

Reference	Title	Code
RD 1	Product User Manual Surface Radiation Products	SAF/CM/DWD/PUM/SFCRAD/ 2.1

TABLE of CONTENT

1	THE EUMETSAT SAF ON CLIMATE MONITORING (CM SAF).....	5
2	INTRODUCTION.....	6
3	RETRIEVAL ALGORITHMS OF THE GAC SURFACE RADIATION PRODUCTS	6
3.1	Shortwave Surface Radiation.....	6
3.1.1	SIS Algorithm	7
3.1.2	SNS Algorithm	13
3.2	Longwave Surface Radiation Products.....	14
3.2.1	SDL Algorithm	14
3.2.2	SOL Algorithm.....	17
3.2.3	SNL Algorithm.....	19
3.3	Surface Radiation Budget and Cloud Forcing.....	19
3.3.1	SRB Algorithm	19
3.3.2	CFS Algorithm.....	19
3.3.3	CFL Algorithm	20
4	REFERENCES.....	21

LIST of FIGURES

Figure 1:	Flow-chart of the calculation of the surface incoming solar radiation under clear-sky conditions. The required input data is shown on the left side of the diagram, the right part represents the calculation of the surface solar irradiance using the MAGIC clear-sky model. The figure is taken from <i>Mueller et al. [2009]</i>	8
Figure 2:	Diagram of the calculation of the surface solar incoming radiation under cloudy conditions. The required input data is shown on the left side of the diagram, the right part represents the calculation of the surface solar irradiance using the look-up tables for the TOA albedo. The figure is taken from <i>Mueller et al. [2009]</i>	9
Figure 3:	Spatial distribution of the surface albedo used in the calculation of the clear-sky surface radiation.....	10
Figure 4:	NOAA 9 AVHRR spectral response functions for the visible (channel 1) and the near-infrared (channel 2) detectors. Figure taken from <i>Hucek and Jacobowitz [1995]</i>	11
Figure 5:	Temporal average of the cloud correction factor derived from the ERA-Interim data set.....	15
Figure 6:	Surface Emissivity Map derived from land cover types.	18

 	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

1 The EUMETSAT SAF on Climate Monitoring (CM SAF)

The importance of climate monitoring with satellites was recognized in 2000 by EUMETSAT Member States when they amended the EUMETSAT Convention to affirm that the EUMETSAT mandate is also to “contribute to the operational monitoring of the climate and the detection of global climatic changes”. Following this, EUMETSAT established within its Satellite Application Facility (SAF) network a dedicated centre, the SAF on Climate Monitoring (CM SAF, <http://www.cmsaf.eu>).

The consortium of CM SAF currently comprises the Deutscher Wetterdienst (DWD) as host institute, and the partners from the Royal Meteorological Institute of Belgium (RMIB), the Finnish Meteorological Institute (FMI), the Royal Meteorological Institute of the Netherlands (KNMI), the Swedish Meteorological and Hydrological Institute (SMHI), the Meteorological Service of Switzerland (MeteoSwiss), and the Meteorological Service of the United Kingdom (UK MetOffice). Since the beginning in 1999, the EUMETSAT Satellite Application Facility on Climate Monitoring (CM SAF) has developed and will continue to develop capabilities for a sustained generation and provision of Climate Data Records (CDR’s) derived from operational meteorological satellites.

In particular the generation of long-term data sets is pursued. The ultimate aim is to make the resulting data sets suitable for the analysis of climate variability and potentially the detection of climate trends. CM SAF works in close collaboration with the EUMETSAT Central Facility and liaises with other satellite operators to advance the availability, quality and usability of Fundamental Climate Data Records (FCDRs) as defined by the Global Climate Observing System (GCOS). As a major task the CM-SAF utilizes FCDRs to produce records of Essential Climate Variables (ECVs) as defined by GCOS. Thematically, the focus of CM SAF is on ECVs associated with the global energy and water cycle.

Another essential task of CM SAF is to produce data sets that can serve applications related to the new Global Framework of Climate Services initiated by the WMO World Climate Conference-3 in 2009. CM SAF is supporting climate services at national meteorological and hydrological services (NMHSs) with long-term data records but also with data sets produced close to real time that can be used to prepare monthly/annual updates of the state of the climate. Both types of products together allow for a consistent description of mean values, anomalies, variability and potential trends for the chosen ECVs. CM SAF ECV data sets also serve the improvement of climate models both at global and regional scale.

As an essential partner in the related international frameworks, in particular WMO SCOPE-CM (Sustained COordinated Processing of Environmental satellite data for Climate Monitoring), the CM SAF - together with the EUMETSAT Central Facility, assumes the role as main implementer of EUMETSAT’s commitments in support to global climate monitoring. This is achieved through:

- Application of highest standards and guidelines as lined out by GCOS for the satellite data processing,
- Processing of satellite data within a true international collaboration benefiting from developments at international level and pollinating the partnership with own ideas and standards,
- Intensive validation and improvement of the CM SAF climate data records,
- Taking a major role in data set assessments performed by research organisations such as WCRP. This role provides the CM SAF with deep contacts to research organizations that form a substantial user group for the CM SAF CDRs,
- Maintaining and providing an operational and sustained infrastructure that can serve the community within the transition of mature CDR products from the research community into operational environments.

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

A catalogue of all available CM SAF products is accessible via the CM SAF webpage, <http://www.cmsaf.eu/>. Here, detailed information about product ordering, add-on tools, sample programs and documentation is provided.

2 Introduction

This CM SAF Algorithm Theoretical Basis Document (ATBD) provides information on the processing algorithm implemented for the retrieval of surface radiation parameters from the AVHRR Global Area Coverage (GAC) data. For the shortwave surface radiation the same algorithm is applied as used in the operational surface radiation processing chain. For the retrieval of the longwave surface radiation the algorithm is based on cloud information derived from satellite, reanalysis data, and topographic information.

More information on the basic accuracy requirements are defined in the product requirements document [AD 1]. The GAC surface radiation data set contains multiple parameters:

Surface Incoming Shortwave Radiation [CM-52, SIS_AVHRR_global_DS, Section 3.1.1],
Surface Net Shortwave Radiation [CM-67, SNS_AVHRR_global_DS, Section 3.1.2],
Surface Downward Longwave Radiation [CM-81, SDL_AVHRR_global_DS, Section 3.2.1],
Surface Outgoing Longwave Radiation [CM-74, SOL_AVHRR_global_DS, Section 3.2.2],
Surface Net Longwave Radiation [CM-88, SNL_AVHRR_global_DS), Section 3.2.3],
Surface Radiation Budget [CM-95, SRB_AVHRR_global_DS, Section 3.3.1],
Cloud Radiative Effect SW [CM-100, CFS_AVHRR_global_DS, Section 3.3.2],
Cloud Radiative Effect LW [CM-101, CFL_AVHRR_global_DS, Section 3.3.3]

3 Retrieval Algorithms of the GAC Surface Radiation Products

In the following the retrieval algorithms used to generate the surface radiation products in the CM SAF GAC data set will be described. The retrieval of the shortwave surface radiation products (SIS, SNS) is presented in Section 3.1, Section 3.2 presents the algorithms used to derive the longwave surface radiation data sets (SDL, SOL, SNL). The algorithms to calculate the surface radiation budget (SRB) and the shortwave and longwave cloud effects (CFS, CFL) are presented in Section 3.3.

3.1 Shortwave Surface Radiation

The retrieval algorithm of the surface shortwave radiation (i.e., the surface radiation in the wavelength region between 200 nm and 4000 nm) used for the processing of the AVHRR GAC data is based on the algorithm used in the operational CM SAF chain [RD 1].

The underlying fundamental assumption of retrieving the surface solar irradiance from satellite observations is that the reflected radiance, as measured by the satellite instrument, is related to the broadband atmospheric transmission, T . From the atmospheric transmission the surface incoming solar radiation, SIS, can be derived:

$$SIS = E_0 \cos(\Theta_0) T, \quad (\text{Eq. 1})$$

where E_0 is the incoming solar flux at the top-of-the-atmosphere ($E_0 = 1368 \text{ W/m}^2$) and Θ_0 the solar zenith angle. The net surface solar radiation is defined as the difference between the incoming and the reflected surface solar radiation:

$$SNS = SIS - SOS, \quad (\text{Eq. 2})$$

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

where SNS is the net surface solar irradiance and SOS the reflected surface solar radiation.

3.1.1 SIS Algorithm

The algorithm used here to derive SIS from the AVHRR GAC data set is based on the application of a look-up-table to derive the atmospheric transmission and the surface incoming solar radiation [*Pinker and Laszlo*, 1992]. The details of the algorithm are given in [*R Mueller et al.*, 2009]. Here, the basic layout and the fundamental assumptions of the algorithm are presented.

The solar surface irradiance is mainly determined by the solar zenith angle, the cloud coverage, the vertically-integrated water vapour and the aerosol optical depth.

The solar zenith angle (SZA) is determined by the rotation of the Earth, the tilting of the Earth axis and their movement around the sun; the SZA can be accurately calculated. While satellite-based information on the integrated water vapour is available from microwave instruments (e.g., the ATOVS package), these instruments / satellite channels are not available from the AVHRR GAC data set. Also no suitable data set of the aerosol optical depth is available from the AVHRR GAC data. For these two parameters, external data sources have to be consulted to calculate the transmissivity and the surface solar incoming radiation. The main information that is used from the AVHRR GAC satellite data is the information on cloud coverage.

The retrieval algorithm used to derive the surface incoming solar radiation consists of two steps. First, the full spectral information of the satellite instrument is used to derive information on cloud coverage for each pixel using the Nowcasting SAF (SAFNWC) software. In case, no cloud is detected (i.e., the satellite pixel is considered '*cloud-free*'), the surface solar irradiance is calculated by radiative transfer modelling using information on the integrated water vapour and the aerosol optical depth from auxiliary sources without the use of additional satellite observations. In the case the cloud retrieval algorithm detects the presence of a cloud, the pixel is considered '*cloudy*' and the atmospheric transmissivity and subsequently the surface solar irradiance is derived using the method described in Section 3.1.1.2.

3.1.1.1 Cloud-free conditions

The calculation of the surface solar irradiance under cloud-free conditions does not require any additional information from satellite, but is performed using the clear-sky Mesoscale Atmospheric Global Irradiance Code (MAGIC, <http://gnu-magic.sourceforge.net/>). Figure 1 presents the flow-chart of the calculation of the surface incoming solar radiation under clear-sky conditions using MAGIC.

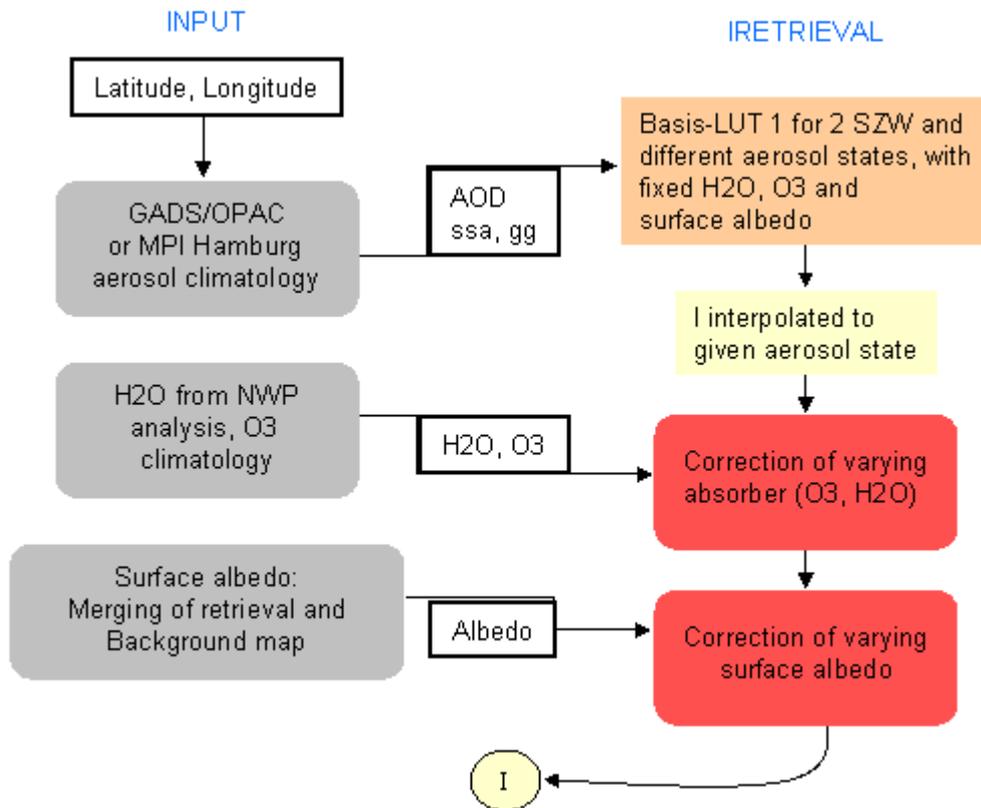


Figure 1: Flow-chart of the calculation of the surface incoming solar radiation under clear-sky conditions. The required input data is shown on the left side of the diagram, the right part represents the calculation of the surface solar irradiance using the MAGIC clear-sky model. The figure is taken from [R Mueller et al., 2009].

As input parameters, aerosol information (i.e., aerosol optical depth, single scattering albedo, backscattering coefficient), vertically-integrated water vapour and ozone, as well as the surface albedo are required.

For the aerosol information, the monthly mean aerosol fields from the GADS/OPAC climatology [Hess et al., 1998] has been used. The integrated water vapour is taken from the ERA-Interim Reanalysis [Dee et al., 2011], which has recently been extended to cover the time span between 1979 and today. The vertical ozone column has been set constant to 335 DU.

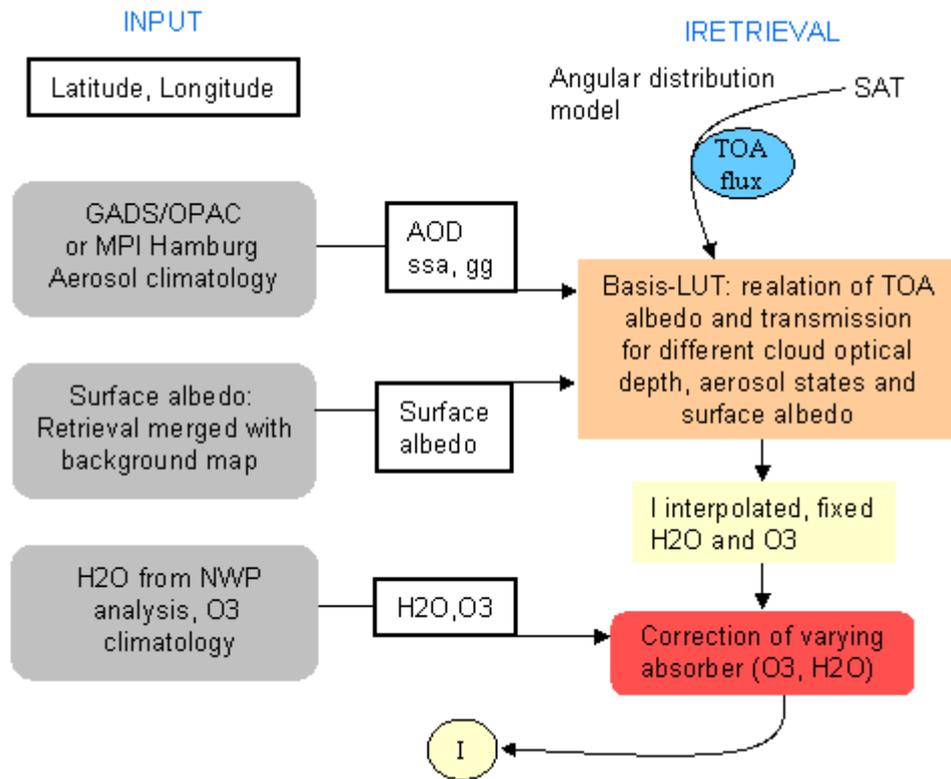


Figure 2: Diagram of the calculation of the surface solar incoming radiation under cloudy conditions. The required input data is shown on the left side of the diagram, the right part represents the calculation of the surface solar irradiance using the look-up tables for the TOA albedo. The figure is taken from [R Mueller et al., 2009].

The surface albedo information is calculated based on the spatial distribution of 20 surface types. The Surface and Atmospheric Radiation Budget (SARB) working group, part of the Clouds and the Earth's Radiant Energy System (CERES) mission, provides global digital information on land cover based on scene types from the International Geosphere/Biosphere Programme (IGBP) on a 1/6 deg grid (<http://www-surf.larc.nasa.gov/surf/index.html>). Using the broadband albedo for each surface type, a temporally-constant global surface albedo map is generated (see Figure 3). Seasonal changes, e.g., due to snow coverage, are not considered. The variation of the surface albedo with solar zenith angle is considered [Briegleb et al., 1986].

This auxiliary information is used in the MAGIC clear-sky solar radiation transfer code to derive the surface solar irradiance.

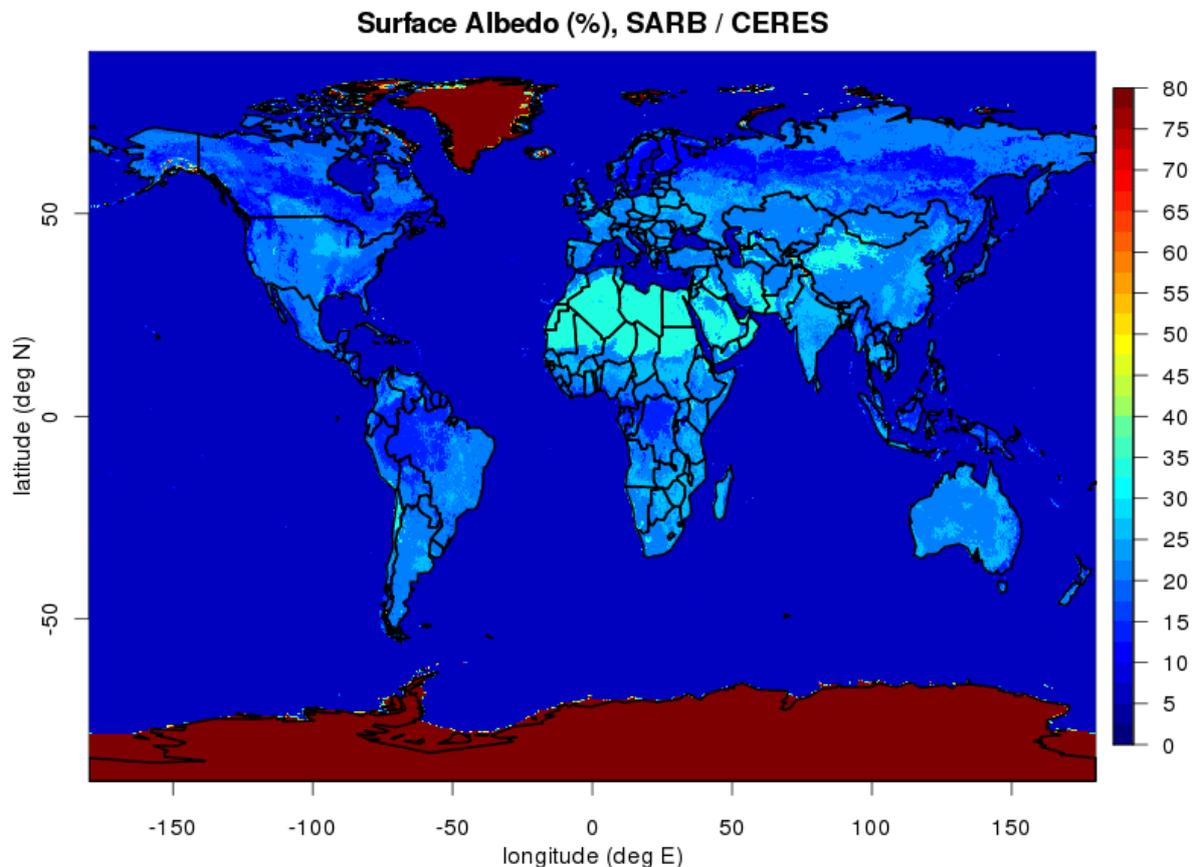


Figure 3: Spatial distribution of the surface albedo used in the calculation of the clear-sky surface radiation.

Look-up tables form the core of the MAGIC clear-sky model. They have been pre-calculated for several aerosol optical depths and types, 2 sun zenith angles (0 and 60 degree) with fixed values of surface albedo (0.2), integrated water vapour column (15 mm) and ozone (345 DU) using the RTM model libRadtran [Mayer and Kylling, 2005].

To calculate the surface solar radiation for the current atmospheric state (i.e., SZA, water vapour, ozone, surface albedo) correction formulas are applied that consider the difference between the reference value of the parameter (i.e., the value used to derive the look-up-table) and the current value of the parameter. The sensitivity of the clear-sky surface irradiance to the surface albedo is small, i.e., a change of the surface albedo by a factor of 2 (e.g., from 0.2 to 0.4) induces only a 2% change on the surface downwelling clear-sky irradiance [Mueller et al., 2009, Figure 4]. The Modified Lambert-Beer (MLB) function is used to derive the dependency of the surface solar radiation from the solar zenith angle based on only 2 pre-calculated solar-zenith angles [R W Mueller et al., 2004]. These optimisations reduce the number of required radiation transfer calculations substantially by a factor of 10.000 compared to 'traditional' look-up table approaches. The computational efficiency of the algorithm makes it perfectly suited for the satellite retrieval of the surface solar radiation under clear-sky conditions. No additional information (e.g., the top-of-the-atmosphere reflectance) is used from the satellite measurement.

3.1.1.2 Cloudy Condition

Under cloudy conditions (i.e., the Nowcasting SAF (SAFNWC) software detects a cloud in the satellite pixel) a different approach is taken to derive the surface solar radiation. Figure 2 presents the diagram of the retrieval of the surface solar incoming radiation under cloudy

conditions, which follows the ideas of [Pinker and Laszlo, 1992]. The auxiliary input data is identical to the input data used to calculate the clear-sky surface radiation, i.e., surface albedo, vertically-integrated water vapour and ozone, and aerosol information. In addition to this auxiliary input data, also satellite data is used to derive the surface radiation under cloudy conditions.

The algorithm requires the satellite-derived top-of-the-atmosphere broadband albedo in the shortwave spectral region as input parameter (see Figure 2). However, this quantity is not measured directly by the AVHRR instrument, but has to be calculated. As a first step, the calculation of the broadband reflectance is conducted based on the measurements of the reflectance in the two visible channels of the AVHRR instruments (see Figure 4) following [Hucek and Jacobowitz, 1995]. The derived broadband reflectance for each pixel is then transferred to broadband fluxes using the bidirectional reflectance distribution function (BRDF, also termed Angular Dependence Model (ADM)) derived for ERBE [Suttles *et al.*, 1986].

The broadband top-of-the-atmosphere albedo is used in a look-up-table approach to derive the atmospheric transmissivity and, subsequently, the surface solar radiation. In addition to the clear-sky approach, under cloudy conditions, also cloud information (in this case the cloud optical depth) has to be taken into account when generating the look-up-tables. To retrieve the relationship between the atmospheric transmissivity and the top-of-the-atmosphere albedo from the look-up-tables, the information on the aerosol optical properties and the surface albedo is taken from the auxiliary data. Based on the measured top-of-the-atmosphere albedo, the corresponding atmospheric transmissivity is extracted from the look-up-tables. As for the clear-sky case, the look-up tables for the cloudy case have been generated for fixed values of vertically-integrated water vapour and ozone. The required correction of the atmospheric transmissivity due to the contribution of these two atmospheric absorbers are applied subsequently (see [R Mueller *et al.*, 2009]).

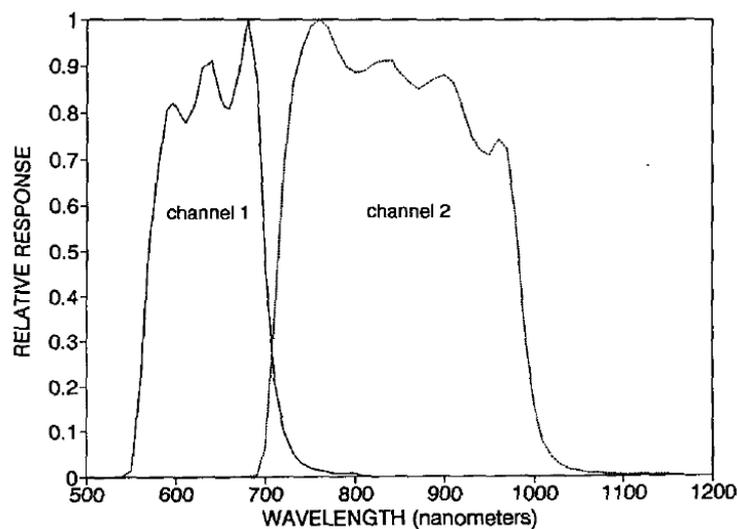


Figure 4: NOAA 9 AVHRR spectral response functions for the visible (channel 1) and the near-infrared (channel 2) detectors. Figure taken from [Hucek and Jacobowitz, 1995]

Based on the retrieved atmospheric transmissivity, the surface solar irradiance is calculated using Equation (Eq. 1) for each satellite pixel.

3.1.1.3 Calculation of gridded averages

The CM SAF GAC SIS data set generated from the AVHRR satellite measurements is generated and provided on a regular lon-lat grid with a grid point spacing of 0.25° as daily

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

and monthly means. To generate this data from the satellite observations, the information from the satellite retrieval (clear-sky and cloudy-sky solar surface radiation) for each pixel is remapped to a regular lon-lat grid with a spatial resolution of 0.05° using the nearest-neighbour remapping. This resolution is comparable to the spatial resolution of the AVHRR instrument, so no spatial or temporal averaging is performed in this step.

In the next step, the daily mean is calculated following the method by [Moser and Raschke, 1984]:

$$I_{dm} = I_{clr,dm} * \frac{\sum I_i}{\sum I_i^{clr}}, \quad (\text{Eq. 3})$$

here I_{dm} is the daily mean of the surface solar irradiance, $I_{clr,dm}$ is the daily mean of the clear sky surface solar irradiance, I_i is the retrieved surface radiation from the satellite retrieval and I_i^{clr} is the clear-sky surface solar radiation that corresponds to I_i . I_i^{clr} is calculated for each satellite pixel during the processing of the satellite data using the MAGIC clear-sky radiation transfer model. The daily mean of the clear-sky surface solar irradiance, $I_{clr,dm}$, is calculated on the 0.05° grid using the MAGIC radiation transfer model. This method to calculate the daily means of the surface radiation substantially reduces the error introduced due to the limited number of observations per pixel per day [Moser and Raschke, 1984].

The daily mean surface radiation on the 0.25°-grid is obtained by averaging the corresponding 25 high-resolution grid boxes. To limit the uncertainty of the calculation of the daily averages due to limited number of observations, all daily mean values of the surface solar irradiance that are based on less than 20 observations on the 0.25°-grid are set to missing value.

The monthly mean data of the surface solar irradiance are calculated as averages from the daily mean values. Only those grid boxes are considered that have more than 20 valid daily means of the surface solar radiation. The remaining grid boxes are considered missing data.

The determination of the exact number of the required pixels in each grid box to derive a meaningful daily average and the number of valid daily means to derive a meaningful monthly average needs further investigations. Based on the validation with surface observations (see validation report) the assumed values (20 observations to derive a daily average, 20 daily averages to derive a monthly average) are shown to ensure a quality of the surface irradiance data set in line with the accuracy requirements. It can be expected that these numbers differ depending on season and region. Projects to further evaluate the impact of the number of observations to derive daily and monthly averages from polar-orbiting satellite observations are under way. The results of these studies will be used in the generation of the next edition of the CM SAF GAC surface radiation data sets.

3.1.1.4 Known Limitations and their Implications

Known limitations and shortcomings of this algorithm to derive the surface solar irradiance:

- The application of the temporally-constant SARB/CERES surface albedo map limits the quality of the data set in regions with varying surface albedo, i.e., in Canada, Alaska, Russia, and Scandinavia, during the times when the surface albedo is greatly different from the value assumed in the SARB/CERES albedo map.

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

- The algorithm requires broadband solar fluxes at the top-of-the-atmosphere to retrieve the atmospheric transmissivity and subsequently the surface solar radiation. The conversion of the satellite-observed radiances at two wavelengths into broadband solar fluxes requires assumptions on the spectral responses of the satellite channels and the bidirectional reflectance distribution function (BRDF), which can introduce large uncertainty into the satellite retrieval under cloudy conditions.
- The algorithm depends on the ability of the cloud-detection software to detect clouds. Misclassification of pixels by the cloud-detection algorithm enhances the uncertainty of the retrieved surface solar radiation.
- The application of monthly climatological aerosol information limits the accuracy of the data set, especially in regions with high interannual and sub-monthly aerosol variability, e.g., desert regions.

Due to the mentioned limitations (i.e., using a constant surface albedo, deriving the broadband reflected flux from the two satellite channels), the accuracy of the CM SAF GAC SIS data set was found to be insufficient over highly-reflecting surfaces. Therefore, all SIS data in those grid boxes was set to missing data for those months in which the CM SAF GAC SAL data set was higher than 20 %.

The mentioned limitations will be addresses and improved in future versions of the CM SAF GAC surface solar radiation data set.

3.1.2 SNS Algorithm

The CM SAF GAC data set of the net surface shortwave radiation (SNS) is derived directly from the CM SAF GAC data sets of the surface solar irradiance (SIS) and the surface albedo (SAL).

The net surface radiation is defined as the difference between the incoming solar surface radiation (SIS) and the outgoing surface radiation (SOS):

$$SNS = SIS - SOS = SIS (1 - SAL), \quad (\text{Eq. 4})$$

with

$$SOS = SAL * SIS. \quad (\text{Eq. 5})$$

For the generation of the CM SAF GAC SNS data set this calculation is conducted on the 0.25 deg grid based on the monthly means of SIS and SAL.

3.1.2.1 Known Limitations

The accuracy of the CM SAF GAC SNS data set depends on the accuracy of the CM SAF GAC SIS and SAL data set and the limitations of their algorithms also apply to the SNS data set (see Section 3.1.1.4 for the limitations of the SIS retrieval algorithm).

Additionally, the following limitations apply:

- The surface albedo in the SAL data set describes the directional-hemispherical reflectance (direct radiation) at a solar zenith angle of 60° and does not consider bi-hemispherical reflectance (diffuse radiation). Applying the SAL data set to the monthly mean surface incoming solar radiation data set introduces temporally- and spatially-dependent uncertainties.

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

In future releases of the CM SAF GAC SNS data set, these limitations will be addressed.

3.2 Longwave Surface Radiation Products

This section describes the algorithms to derive the surface longwave radiation products of the CM SAF GAC data set: The surface downwelling longwave radiation (SDL), the surface outgoing longwave radiation (SOL), and the surface net longwave radiation (SNL).

The longwave surface radiation budget is decoupled from the visible and infra-red radiation at the top-of-the-atmosphere [Ellingson, 1995], which limits the suitability of the AVHRR GAC data to retrieve the longwave surface radiation components.

The surface downwelling longwave radiation is, under cloud-free conditions, mainly determined by the temperature and water vapour in the lowest kilometre of the atmosphere [Ohmura, 2001]. Under cloudy conditions, the height of the cloud base determines the surface downwelling longwave radiation. In both cases, the AVHRR satellite signal alone does not contain enough relevant information to retrieve the surface longwave downwelling radiation within sufficient accuracy.

The surface outgoing longwave radiation is dominated by the surface temperature, which can, under cloud-free conditions, be derived from the AVHRR satellite observations. No information on the surface temperature, and hence the surface outgoing longwave radiation, is present in the satellite measurements under cloudy conditions.

To overcome this fundamental limitation, data from the ERA-Interim data set is used to generate the CM SAF GAC surface longwave radiation data set. The ERA-Interim data set is generated at the spectral T255 horizontal resolution, corresponding to approximately 79 km spacing on a reduced Gaussian grid [Dee et al., 2011]. To reduce spin-up effects of the reanalysis model, the monthly means of the surface longwave radiation data based on the 12-to-24 h forecasts are used.

The information on the cloud fraction from the CMSAF GAC CFC data set and additional topographic information is used to provide the high spatial resolution of the CM SAF GAC surface longwave radiation data sets.

3.2.1 SDL Algorithm

The CM SAF algorithm to derive the surface downwelling longwave (SDL) radiation from the AVHRR GAC data set is based on the monthly mean surface downwelling longwave radiation data from the ERA-Interim data set. The CM SAF GAC cloud fraction (CFC) data set and high-resolution topographic information are used to generate the CM SAF GAC SDL data set on the global 0.25° grid.

3.2.1.1 Calculation of the Cloud Correction Factor

In a preparatory step, the sensitivity of the surface downwelling longwave radiation to cloud coverage is determined from the ERA-Interim data set. The cloud correction factor (CCF) is defined as the ratio of the difference between the clear-sky and all-sky surface longwave downwelling radiation to the cloud fraction:

$$CCF = \frac{\Delta SDL}{CFC_{ERA}} = \frac{SDL_{allsky} - SDL_{clr}}{CFC_{ERA}} \quad (\text{Eq. 6})$$

The cloud correction factor describes the sensitivity of the surface downwelling longwave radiation to changes in the cloud fraction. The CCF is determined from the ERA-Interim monthly mean data by linear regression between ΔSDL and CFC for each grid box. The

calculation of the regression is conducted separately for each month resulting in a CCF data set for each month of the year based on the 31 years of ERA-Interim data. All grid boxes with a mean total cloud fraction of more than 20 % and mean ΔSDL below 3% of SDL are set to zero. In these grid boxes (only in tropical regions), the impact of cloud coverage on the surface downwelling longwave radiation is negligible. The cloud correction factor is derived from the linear regression for grid boxes that exhibit a CFC variability of more than 10 % and for grid boxes with a correlation coefficient between ΔSDL and CFC above 0.6. For the remaining grid boxes, CCF is extrapolated from neighbouring grid boxes. Figure 5 shows the temporally averaged cloud correction factor derived from the 31 year-long ERA-Interim data set.

In the tropical regions, clouds have no impact on the surface downwelling longwave radiation, i.e., the differences of the monthly means of the clear-sky and the all-sky surface downwelling longwave radiation is close to zero, even though cloud coverage is larger than 0. The impact of clouds on the surface longwave downwelling radiation is largest over the Southern Oceans, especially over the Pacific, where clouds can add more than 100 W/m² to the clear-sky surface longwave radiation.

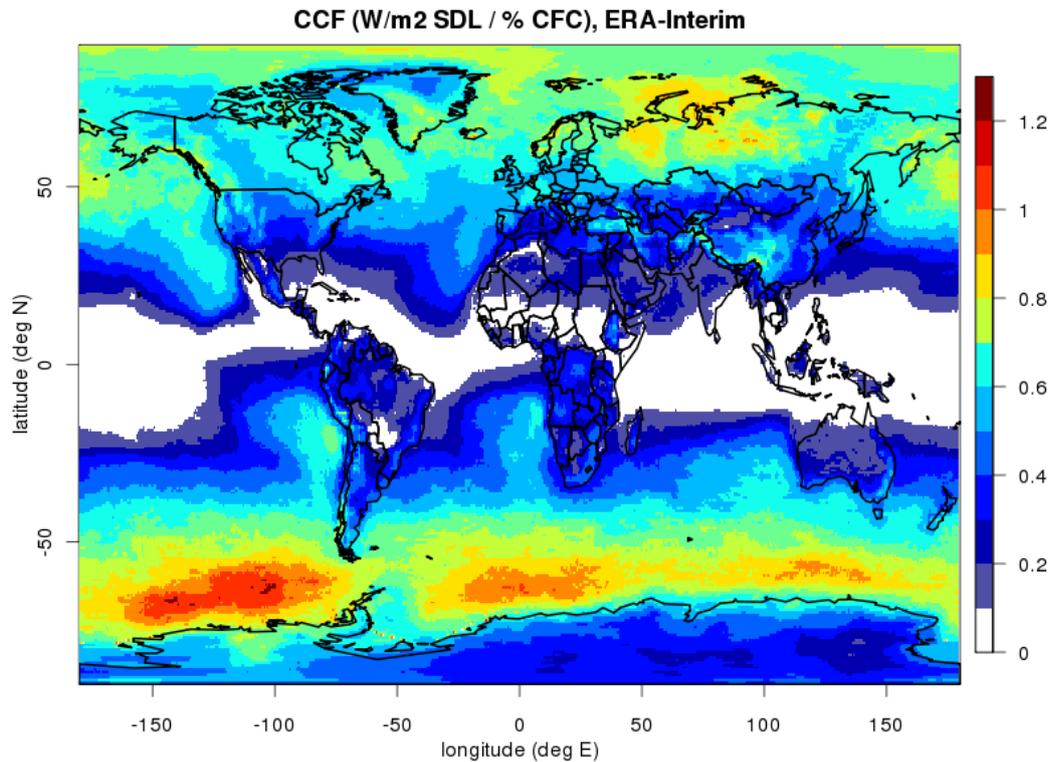


Figure 5: Temporal average of the cloud correction factor derived from the ERA-Interim data set.

3.2.1.2 Calculation of SDL

The surface downwelling longwave radiation from the AVHRR GAC data set is calculated from the monthly mean of the clear-sky surface downwelling longwave radiation derived from ERA-Interim and the cloud correction term, i.e., the CCF multiplied with the cloud cover derived from the CM SAF GAC CFC data set:

$$SDL_{GAC} = SDL_{clr} + CFC_{GAC} * CCF = SDL_{clr} + CFC_{GAC} * \frac{\Delta SDL}{CFC_{ERA}}, \quad (\text{Eq. 7})$$

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

here SDL_{clr} denotes the monthly mean clear-sky surface downwelling longwave radiation from ERA-Interim and CFC_{GAC} is the cloud fraction from the CM SAF GAC data set. By the application of the cloud correction using the GAC CFC data set the spatial resolution of the data is substantially improved and corresponds to the spatial resolution of the CM SAF GAC CFC data set. To ensure the conservation of the absolute values from the ERA-Interim data the SDL_{GAC} data is rescaled after this step to reproduce the SDL data from ERA-Interim on the coarse ERA-Interim grid.

Topography substantially modifies the surface longwave downwelling radiation, because of the change in near-surface temperature induced by changes in altitude. Based on observations, [Wild *et al.*, 1995] found that the surface downwelling longwave radiation decreases on average by 2.8 W/m^2 per 100 m in elevation. To account for this effect when generating the CM SAF GAC SDL data set, the Global Land One-km Base Elevation Project (GLOBE) database has been used to calculate the topography on the 0.25° global grid. The GLOBE data set is a global 1-km gridded, quality-controlled Digital Elevation Model (DEM) accessible from the National Geophysical Data Centre at NOAA (<http://www.ngdc.noaa.gov/mgg/topo/globe.html>). Using the topography information from the ERA-Interim data set, the surface downwelling longwave radiation (SDL_{GAC}) has been corrected according to [Wild *et al.*, 1995] to account for the differences in the surface elevation between the two grids. The conservation of the surface downwelling longwave radiation on the original ERA-Interim grid is taken into account during the topographic correction.

The CM SAF GAC data set of the surface downwelling longwave radiation is globally available as monthly means from 1982 to 2009 with a grid point distance of 0.25° .

3.2.1.3 Known limitations

Known limitations and shortcomings of this algorithm to derive the surface downwelling longwave radiation:

- The cloud correction factor (CCF) is determined on a monthly basis by linear regression using ERA-Interim data between 1979 and 2010. By using linear regression to determine CCF, Equation (Eq. 7) is only valid in an 'average' sense and no interannual variability is considered. For a given year and month the cloud correction of the surface downwelling longwave radiation is (slightly) different to the climatological correction factor for this months. This introduces some uncertainties into the calculation of the CM SAF GAC SDL data set.
- The topography correction of the surface downwelling longwave radiation is based on measurements obtained in the European Alpine region [Wild *et al.*, 1995]. By analysing the differences between ERA-Interim-derived SDL and global surface observations from the Baseline Surface Radiation Network (BSRN), no improved topographic correction could be determined based on the available observations (Sebastian Limbach, pers. comm.). Dedicated surface observations of the altitudinal dependence of the surface downwelling longwave radiation are required to improve the topographic correction term for the surface downwelling longwave radiation for the global scale. The application of one constant value for the topographic correction in the calculation of the CM SAF GAC SDL data set is a limitation, which introduces uncertainty.

These limitations will be addressed in future versions of the CM SAF GAC SDL data set.

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

3.2.2 SOL Algorithm

The surface outgoing longwave radiation (SOL) is primarily determined by the surface temperature and the emissivity of the surface. In the longwave spectral region, the emissivity of the Earth surface is close to unity, resulting in a very small contribution of the reflected surface downwelling longwave radiation to the surface outgoing longwave radiation.

The ability to retrieve the surface outgoing longwave radiation from satellite observations alone is limited by the ability to retrieve the surface temperature with high accuracy. Direct retrieval of the surface temperature from satellite using VIS / IR channels is fundamentally restricted to clear-sky conditions. The high sensitivity of the surface outgoing longwave radiation to the surface temperature (SOL is proportional to T_{surf}^4 .) results in large uncertainties in the outgoing longwave radiation even under perfect conditions.

Here, we use ERA-Interim data to generate the CM SAF GAC data set of the surface outgoing longwave radiation. To prepare the CM SAF GAC data set on the global 0.25° grid, the ERA-Interim data is corrected to account for differences in the terrain elevation and the emissivity between the ERA-Interim grid and the CM SAF GAC grid.

As a first step, the surface temperature that corresponds to the monthly mean surface outgoing longwave radiation from ERA-Interim is calculated:

$$T_{surf} = \sqrt[4]{\frac{SOL_{ERA}}{\epsilon \cdot \sigma}}, \quad (\text{Eq.8})$$

where SOL_{ERA} is the monthly mean surface outgoing longwave radiation from ERA-Interim, ϵ is the emissivity of the ERA-Interim grid box, and σ is the Stefan-Boltzman constant ($\sigma = 5.67 \cdot 10^8 \text{ Wm}^{-2} \text{ K}^{-4}$).

The surface emissivity on the ERA-Interim grid is based on land cover types provided by the Global Land Cover 2000 (GLC2000) and Global Land Cover Characteristics (GLCC) data bases. Both data sets are derived from analysis of satellite observations and provide the data at a spatial resolution of 1 km. The GLC2000 data set is mainly based on observations from the VEGETATION instrument onboard the SPOT 4 satellite and covers most of the globe, except Antarctica [Bartholome and Belward, 2005]; the GLCC data is based on AVHRR measurements [Loveland et al., 2000]. Here, the GLCC is used in regions where GLC2000 information is not available. The land cover types are converted to land type classes and the broadband emissivity is calculated based on the data given in Wilber et al. [1999] (See Figure 6). The emissivity derived on the original resolution of the land type data are then averaged onto the ERA-Interim grid.

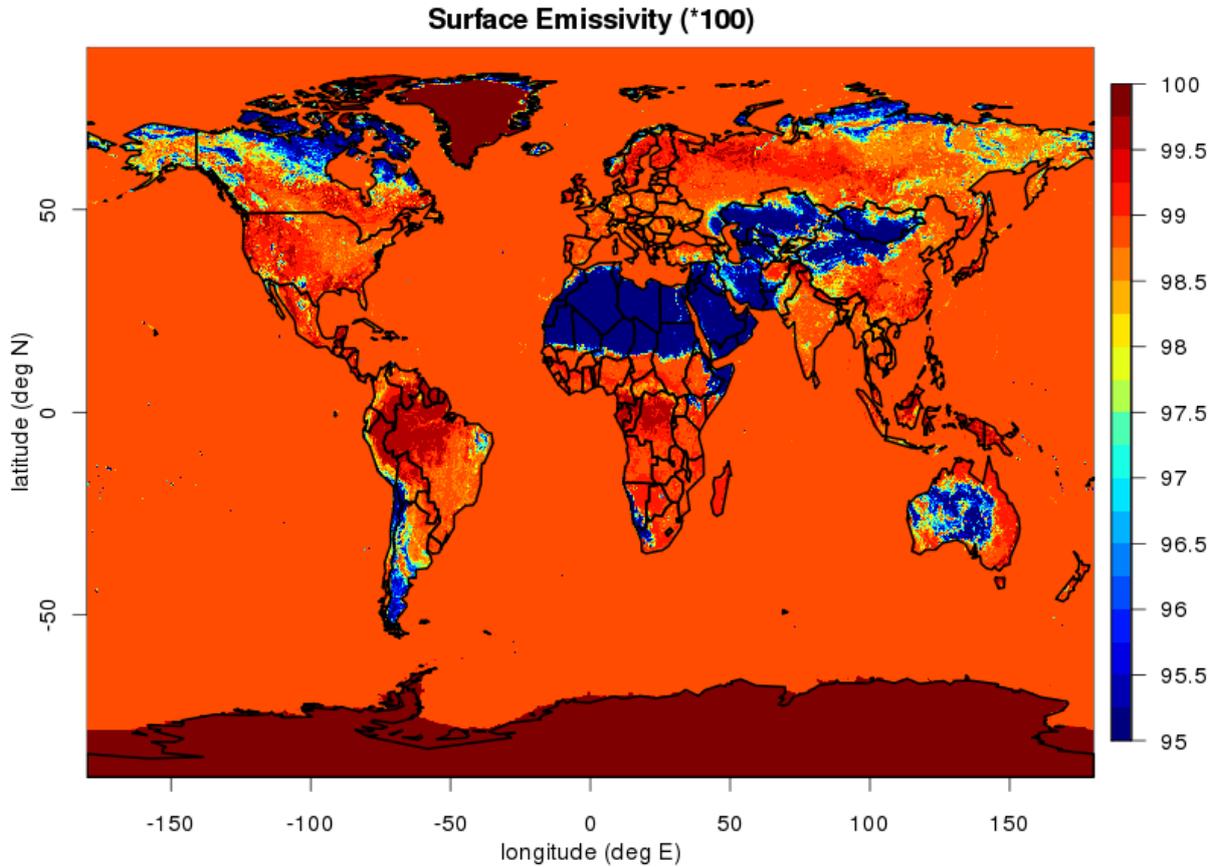


Figure 6: Surface Emissivity Map derived from land cover types.

The SOL-consistent surface temperature from ERA-Interim is adjusted to account for differences between the terrain elevation on the ERA-Interim grid and the elevation on the global 0.25°-grid by applying the dry-adiabatic temperature gradient of $\Delta T = -9.81 \text{ K / km}$:

$$\Delta T_{srf} = \Delta h * \Delta T, \quad (\text{Eq.9})$$

where Δh is the difference in terrain elevation between the 0.25° GAC grid and the ERA-Interim grid in kilometres. The surface outgoing longwave radiation on the global 0.25° grid can then be calculated:

$$SOL = \epsilon * \sigma * (T_{srf} + \Delta T_{srf})^4 \quad (\text{Eq.10})$$

in the calculation of the SOL data set on the global 0.25° grid, it is ensured that the SOL values on the ERA-Interim grid are conserved. The surface outgoing longwave radiation is positively defined in the CM SAF GAC SOL data set.

3.2.2.1 Known limitations

Here is a list of limitations of the SOL data set:

- The topographic correction of the SOL data from ERA-Interim is based on the assumption that the representative monthly mean surface temperature is modified with the dry-adiabatic temperature gradient as a function of elevation. This assumption needs to be verified and introduces some uncertainty in the current data set.

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

- The emissivity used to derive the surface temperature that corresponds to the monthly mean surface outgoing longwave radiation from ERA-Interim is derived from land type classes and predefined emissivity. In ERA-Interim, the surface emissivity also depends on additional parameters, e.g., soil moisture. Hence, the calculated corresponding surface temperature is slightly different to the one used within ERA-Interim, which introduces some uncertainty in the topographic correction of the SOL ERA-Interim data. The impact on the CM SAF GAC SOL data set is considered marginal.

3.2.3 SNL Algorithm

The surface net longwave radiation is defined as the sum of the downwelling and the upwelling longwave surface radiation. Since, in the case of the CM SAF GAC surface longwave radiation data sets, the surface outgoing longwave radiation is positively defined (Section 3.2.2), the surface net longwave radiation is calculated by the difference between the downwelling and the upwelling longwave surface radiation:

$$SNL = SDL - SOL. \quad (\text{Eq.11})$$

The calculation is based on the monthly mean CM SAF GAC data sets of the surface longwave downwelling (SDL) and upwelling radiation (SOL) and available on the 0.25 deg global grid. As SOL usually is larger than SDL, values of SNL typically are below zero.

3.2.3.1 Known limitations

Equation (Eq.11) to calculate the surface net longwave radiation is based on the definition of this quantity, so only the limitations of the input data sets (i.e., CM SAF GAC SDL (Section 3.2.1.3) and CM SAF GAC SOL (Section 3.2.2.1)) apply.

3.3 Surface Radiation Budget and Cloud Forcing

Based on the surface shortwave and longwave data sets the surface radiation budget and the short- and longwave surface cloud forcing are calculated.

3.3.1 SRB Algorithm

The surface radiation budget is calculated as the sum of the shortwave and the longwave net surface radiation fluxes and can be derived directly from the corresponding monthly mean CM SAF GAC data sets:

$$SRB = SNS + SNL. \quad (\text{Eq.12})$$

The calculation is based on the monthly mean CM SAF GAC data sets of the net surface longwave (SNL) and shortwave (SNS) and available on the 0.25 deg global grid.

3.3.1.1 Known limitations

The equation to calculate the surface radiation budget is based on the definition of this quantity, so only the limitations of the input data sets (i.e., CM SAF GAC SNS and CM SAF GAC SNL) apply.

3.3.2 CFS Algorithm

The shortwave cloud radiative effect is defined as the difference between the net shortwave surface radiation fluxes under all-sky and under clear sky conditions:

$$CFS = SNS - SNS_{clr}, \quad (\text{Eq.13})$$

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

where SNS is the net surface shortwave radiation and SNS_{clr} the net surface shortwave radiation under clear sky conditions. Using the surface albedo, the equation can be transformed into

$$CFS = (SIS - SIS_{clr}) (1 - SAL). \quad (\text{Eq.14})$$

The clear-sky surface downwelling solar radiation is calculated in the process of generating the surface downwelling solar radiation data set (see Section 3.1.1) and also available as monthly means on the CM SAF GAC 0.25° grid. The CFS is generated by directly applying Equation (Eq.14) to the monthly mean CM SAF data sets of SIS and SAL and available as monthly means on the CM SAF GAC 0.25 deg grid.

3.3.2.1 Known limitations

The equation to calculate the shortwave surface cloud forcing is based on the definition of this quantity, so only the limitations of the input data sets (i.e., CM SAF GAC SIS and CM SAF GAC SAL and the monthly mean clear-sky surface radiation) apply.

3.3.3 CFL Algorithm

The longwave cloud radiative effect is defined as the difference of the net longwave surface radiation fluxes under all-sky and under clear-sky conditions:

$$CFL = SNL - SNL_{clr}, \quad (\text{Eq. 15})$$

where SNL is the net longwave surface radiation and SNL_{clr} is the net longwave surface radiation under clear-sky conditions. With the assumption that the difference between the all-sky and the clear-sky surface outgoing longwave radiation is negligible the longwave cloud radiative can be calculated from the differences of the downwelling surface longwave fluxes under all-sky and clear-sky conditions:

$$CFL = SDL - SDL_{clr}. \quad (\text{Eq.16})$$

Taking into account Equation (Eq. 7), CFL can be calculated from the cloud fraction and the cloud correction factor:

$$CFL = CFC * CCF. \quad (\text{Eq.17})$$

The longwave cloud forcing is generated on the global CM SAF GAC grid using the monthly mean CM SAF GAC CFC data set and the cloud correction factor on the global 0.25° grid.

3.3.3.1 Known limitations

The equation to calculate the longwave surface cloud forcing is based on the definition of this quantity. The assumption that the difference between the outgoing longwave radiation under clear-sky and all-sky conditions is equivalent to the assumption that surface-reflected downwelling longwave radiation only accounts for a small contribution to the outgoing longwave surface radiation. The uncertainty introduced by this assumption is expected to be marginal. Additional limitations arise from the applications of the CM SAF GAC CFC data set and the cloud correction factor based on the ERA-Interim data set.

	Algorithm Theoretical Basis Document Surface Radiation CLARA-A1	Doc.No.: SAF/CM/DWD/ATBD/GAC/RAD Issue: 1.2 Date: 02.07.2012
---	--	--

4 References

- Bartholome, E., and A. S. Belward (2005), GLC2000: a new approach to global land cover mapping from Earth observation data, *International Journal of Remote Sensing*, 26(9), 1959-1977.
- Briegleb, B., P. Minnis, V. Ramanathan, and E. Harrison (1986), Comparison of Regional Clear Sky Albedos Inferred from Satellite-Observations and Model Computations, *Journal of Climate and Applied Meteorology*, 25(2), 214-226.
- Dee, D., et al. (2011), The ERA-Interim reanalysis: configuration and performance of the data assimilation system, *Quarterly Journal of the Royal Meteorological Society*, 137(656), 553-597.
- Ellingson, R. G. (1995), Surface Longwave Fluxes From Satellite-Observations - a Critical-Review, *Remote Sensing of Environment*, 51(1), 89-97.
- Hess, M., P. Koepke, and I. Schult (1998), Optical properties of aerosols and clouds: The software package OPAC, *Bulletin of the American Meteorological Society*, 79(5), 831-844.
- Hucek, R., and H. Jacobowitz (1995), Impact of Scene Dependence on AVHRR Albedo Models, *Journal of Atmospheric and Oceanic Technology*, 12(4), 697-711.
- Loveland, T. R., B. C. Reed, J. F. Brown, D. O. Ohlen, Z. Zhu, L. Yang, and J. W. Merchant (2000), Development of a global land cover characteristics database and IGBP DISCover from 1 km AVHRR data, *International Journal of Remote Sensing*, 21(6-7), 1303-1330.
- Mayer, B., and A. Kylling (2005), Technical note: The libRadtran software package for radiative transfer calculations - description and examples of use, *Atmospheric Chemistry and Physics*, 5, 1855-1877.
- Moser, W., and E. Raschke (1984), Incident Solar-Radiation Over Europe Estimated From Meteosat Data, *Journal of Climate and Applied Meteorology*, 23(1), 166-170.
- Mueller, R., C. Matsoukas, A. Gratzki, H. Behr, and R. Hollmann (2009), The CM-SAF operational scheme for the satellite based retrieval of solar surface irradiance - A LUT based eigenvector hybrid approach, *Remote Sensing of Environment*, 113(5), 1012-1024.
- Mueller, R. W., et al. (2004), Rethinking satellite-based solar irradiance modelling - The SOLIS clear-sky module, *Remote Sensing of Environment*, 91(2), 160-174.
- Ohmura, A. (2001), Physical basis for the temperature-based melt-index method, *Journal of Applied Meteorology*, 40(4), 753-761.
- Pinker, R., and I. Laszlo (1992), Modeling Surface Solar Irradiance For Satellite Applications on a Global Scale, *Journal of Applied Meteorology*, 31(2), 194-211.
- Wild, M., A. Ohmura, H. Gilgen, and E. Roeckner (1995), Regional Climate Simulation With a High-Resolution GCM - Surface Radiative Fluxes, *Climate Dynamics*, 11(8), 469-486.